



(JPN ONLY)

For various industrial and professional gas combustion devices

Gas combustion systems

- Port size: Rp1/4 to 21/2, flange 25A to 200A
- Working pressure: low pressure, medium pressure

Catalog No.
G-2

Pursuing advanced safety technology, integration and systemization.

- DIN-DVGW Standards
- Select the perfect model for your application
- Energy-saving, space-saving and compact

Gas valve

- Low pressure gas combination valve



GAV

- Solenoid valve



DSG

- Solenoid valve



DSG-W

- Solenoid valve



MN

- Solenoid valve



VNA

- Solenoid valve



VLA

- Solenoid valve



VNA-R/RH

- Solenoid valve (normally open type)



VNR

- Safety shutoff valve (increased fire safety specifications)




VNM-25-K

Special purpose control systems

Medium pressure gas safety shutoff control system

-
- Medium pressure gas safety shutoff control system
 - Solenoid valve
 - Solenoid valve
 - Governor
-

TAC-25

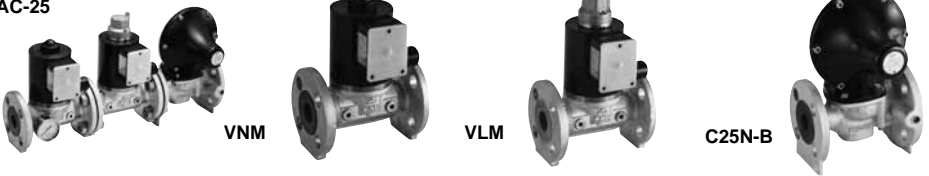

-
- Motorized valve
 - Motorized valve
 - Motor driven ball valve
-



-
- Ball valve
 - Filter
 - Governor
-



-
- Pressure switch
 - Pressure switch
-

